

► APAC Region

Inventronics Hangzhou - Headquarters

Inventronics Science and Technology Park, #459 Jianghong Road,
Binjiang District, Hangzhou, Zhejiang, China, 310052
Tel: +86-571-56565800
E-mail: sales@inventronicsglobal.com

Inventronics Shenzhen

2F,Block B,Jianxing Technology Building,No.3151 Shahe West
Road,Nanshan District, Shenzhen, China
Tel: +86-571-56565800
E-mail: sales@inventronicsglobal.com

Inventronics Japan Office

Regus ShinYokohama Business Center
Wise Next ShinYokohama 3F
2-5-14 ShinYokohama, Kohoku-ku, Yokohama-shi, Kanagawa, Japan 222-0033
Tel: +81-9055297496
E-mail: jp-sales@inventronicsglobal.com

Inventronics Indonesia Office

JB Tower 10th floor
Jl. Kebon Sirih no. 48-50 Gambir,Jakarta, 10110, Indonesia
Tel: +62 21 5095 8096
Email: id-sales@inventronicsglobal.com

Inventronics Singapore Office

7 Holland Village Way,
Lobby B, #05-03 / 04 / 05,
Singapore 275748
Tel: +65 9337 5247
E-mail: sg-sales@inventronicsglobal.com

Inventronics Guangzhou

Room 1105-1107, Clifford Corporate Center Building
No. 15, Fuhua Road, Clifford Estate 511496 Panyu,
Guangzhou City, Guangdong Province, China
E-mail: sales@inventronicsglobal.com

Inventronics (Hong Kong) Limited

E-mail: sales@inventronicsglobal.com

Inventronics Korea Inc.

Suite-615, 501, Teheran-ro, Gangnam-gu, Seoul,
Republic of Korea (06168) (V-flex)
Email: kr-sales@inventronicsglobal.com

Inventronics Thailand Office

E-mail: th-sales@inventronicsglobal.com

Inventronics Vietnam Office

E-mail: vn-sales@inventronicsglobal.com

Inventronics Malaysia Sdn. Bhd.

Level 4, Uptown 7, Jalan SS21/39, Damansara Utama,
47400 Petaling Jaya, Selangor, Malaysia
Tel: +6012 263 0238
E-mail: my-sales@inventronicsglobal.com

Inventronics Australia Office

NSW, Australia
E-mail: anz-sales@inventronicsglobal.com

► Europe Region

Inventronics Netherlands

Polluxstraat 21, 5047 RA Tilburg, The Netherlands
Tel: +31-857-470-061
Email: eu-sales@inventronicsglobal.com

Inventronics Italy

Via Castagnole 65/A, 31100 Treviso, Italy
Email: support@inventronicsglobal.com

Inventronics Germany

Parking 31-33, 85748 Garching, Germany
Email: support@inventronicsglobal.com

Inventronics France

18 Rue Gaston Romazzotti, 67120 Molsheim, France
Tel: +33 3 68 41 88 99
Email: support@inventronicsglobal.com

► India Region

Inventronics India

Head Office: 4th & 5th Floor, B-Wing, Skyheights, Valipeer Road,
Kalyan (west), Pin Code-421301
Factory: Survey No.15, All India Logistics Park, Janval Village, Lonad
Village Road, Taluka- Bhiwandi -421 302-Thane
Tel: +91-9845054416
E-mail: in-sales@inventronicsglobal.com

► MEA Region

Inventronics UAE

#405 E wing HQ Building, DSO, Dubai, UAE
E-mail: support@inventronicsglobal.com



Scan this QR code for
more regional sales
contacts.



inventronicsglobal.com

► Americas Region

Inventronics USA

2825 S Tulsa Ave. Oklahoma City, OK 73108 USA
Tel: +1-405-600-7480
E-mail: usa-sales@inventronicsglobal.com

Inventronics Mexico

Carretera San Martín de las Flores #520
Building 8A Parque Industrial Prologis El Salto
San Pedro Tlaquepaque, Jalisco, Mexico
Tel: +521 3338634039
E-mail: usa-sales@inventronicsglobal.com

Inventronics Brazil


Barueri/SP, Brazil
Tel: +55(11)2680-8310
E-mail: usa-sales@inventronicsglobal.com

inventronics

Architectural Lighting – Constant Voltage Driver Selection Guide



📍 Raffles London at The OWO

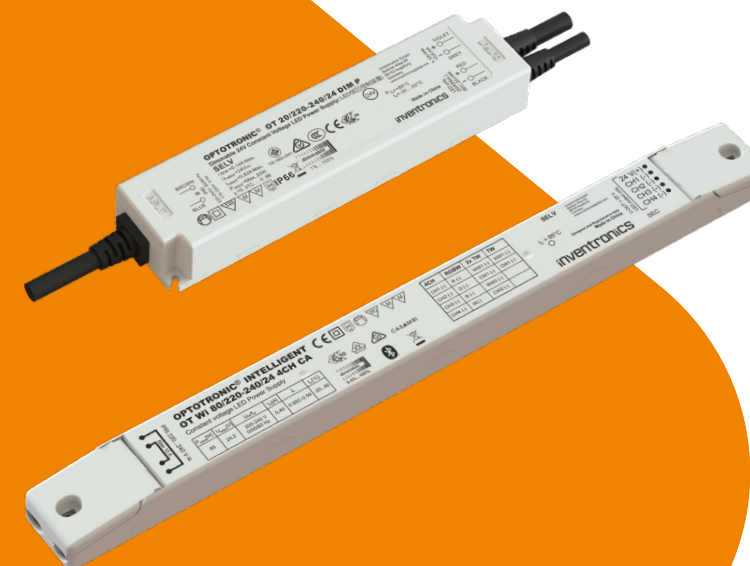

2026 H2

Architectural Lighting

Experience the ultimate in world-class quality with our portfolio — enabling you to specify with unwavering confidence and peace of mind.



Expertise

Our lighting systems are designed to support unique and long-lasting lighting experiences



Flexible
and changeable



Dynamic regulation




Durable
and long-lasting


System Value

- Highest optical uniformity with outstanding stability over time of color coordinates & luminous flux levels
- Complete, tested, and guaranteed interoperable components to build any seamless curvilinear lighting systems.
- Extended installation possibilities, with the LED driver up to 50m away from the LED module ensuring full dimming functionality, with accurate dimming down to 0.1%.
- Our lighting systems can create the most precise smart light effects, thanks to a state-of-the-art set of controllable devices, including both wired and wireless controls and sensors.
- Our global technical service ensures the necessary on-site support for your lighting project, including component customization.

Lighting System Solutions

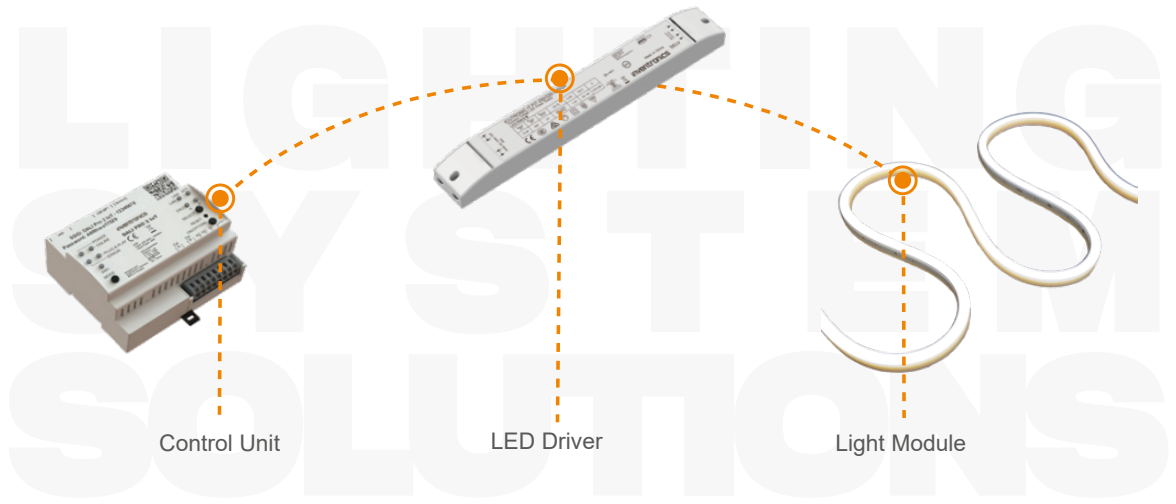

Sub-applications

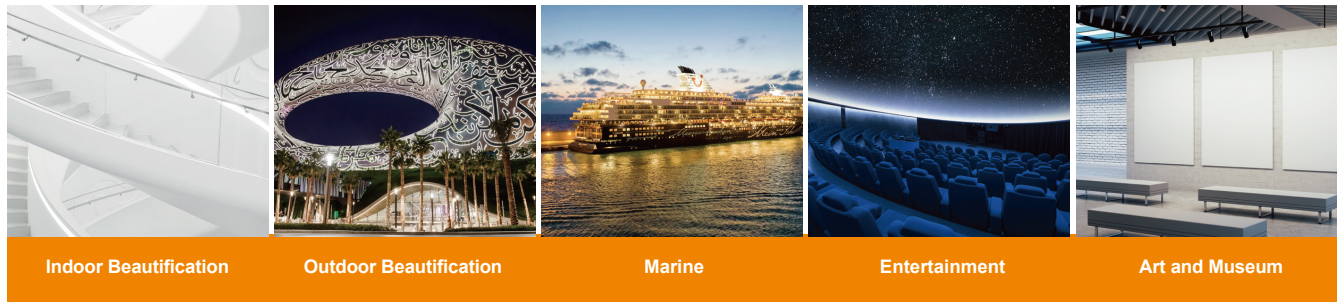

Page	Application	Family	Dimming	Output Voltage	1CH: Max Output Power										1CH: Max Output Power										2CH: Max Output Power						4CH: Max Output Power		
P05 - P06	Indoor	OT Wi	Wireless	24V				50W		80W		160W										160W			50W	80W							
		OTi DALI	DALI-2	24V		30W		50W		80W		160W									160W			50W	80W	250W							
				48V				50W		80W		160W														250W							
		IT DIM	DALI-2/ 0-10V	24V		36W				75W		150W	200W						36W	75W		150W	200W										
		OT FIT PC	Phase Cut	24V		36W				75W		150W																					
P07 - P08		OT SLIM	On/Off	24V		30W		60W			100W	160W		250W																			
		IT FIT	On/Off	24V		30W		60W				120W	180W	250W																			
		ELEMENT G2	On/Off	12V		30W		60W				120W	180W																				
		ELEMENT G3	On/Off	24V		30W		60W				120W	180W	250W																			
P09 - P10	Outdoor	OTi DALI	DALI-2	24V																					100W	210W							
		IT DIM	DALI-2/ 0-10V/PWM	24V														36W	75W	100W	150W	250W	350W										
		OT FIT	On/Off	12V		30W		60W			150W			300W																			
				24V					80W		150W	200W		300W																			
		OT	On/Off	24V	20W		40W	60W			100W	130W		250W																			



OT Wi



OTi DALI



IT DIM



OT FIT PC


Product Family	Product Name	EAN10	Isolation	Dimming Interface	Touch DIM	Progra-mming Interface	Input Voltage AC	Input Voltage DC	Output Power	Output Voltage	Power Factor [λ]	Efficiency (max.) [%]	Ripple (100 Hz) [%]	Lifetime [h]	Ambient Temperature Range [°C]	Max Tc [°C]	Prote-ction Class	IP Rating	Length [mm]	Width [mm]	Height [mm]	Certificates & Approbations	Standard pack [pcs.]
OT Wi	OT Wi 50/220-240/24 1CH NLC	6937186131874	SELV	Bluetooth NLC	No	n/a	198...264 V	176...276 V	0...50 W	24.2 V	0.82...0.99	92	< 1	50k h / Tc MAX	-20...+45	70	I, II	IP20	346	32	22	CE, VDE-ENEC, MM, RCM	20
	OT Wi 80/220-240/24 1CH NLC	6937186131898	SELV	Bluetooth NLC	No	n/a	198...264 V	176...276 V	0...80 W	24.2 V	0.95...0.99	93	< 1	50k h / Tc MAX	-20...+45	85	I, II	IP20	346	32	22	CE, VDE-ENEC, MM, RCM	20
	OT Wi 160/220-240/24 1CH NLC	6937186131911	SELV	Bluetooth NLC	No	n/a	198...264 V	176...276 V	0...160 W	24.2 V	0.98...0.99	93	< 1	50k h / Tc MAX	-20...+45	90	I, II	IP20	300	50	35	CE, VDE-ENEC, MM, RCM	20
	OT Wi 50/220-240/24 4CH CA	6937186115195	SELV	Bluetooth CASAMBI	No	CASAMBI	198...264 V	176...276 V	0...50 W	24.2 V	0.82C...0.99	92	< 1	50k h / Tc MAX	-20...+45	70	I, II	IP20	346	32	22	CE, ENEC 10, VDE, RCM, MM	20
	OT Wi 80/220-240/24 4CH CA	6937186115171	SELV	Bluetooth CASAMBI	No	CASAMBI	198...264 V	176...276 V	0...80 W	24.2 V	0.95...0.99	93	< 1	50k h / Tc MAX	-20...+45	85	I, II	IP20	346	32	22	CE, ENEC 10, VDE, RCM, MM	20
	OT Wi 160/220-240/24 2CH CA	6937186115218	SELV	Bluetooth CASAMBI	No	CASAMBI	198...264 V	176...276 V	0...160 W	24.2 V	0.92C...0.99	93	< 1	50k h / Tc MAX	-20...+45	90	I, II	IP20	300	50	32	CE, ENEC 10, VDE, RCM, MM	20
OTi DALI	OTi DALI 30/220-240/24 1CH	6937186115119	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	30 W	24.2 V	0.32...0.95	88	< 1	50k h / Tc MAX	-20...+50	80	I, II	IP20	103	67	29.5	CE, CCC, BIS, EL, ENEC 25, RCM, MM	30
	OTi DALI 50/220-240/24 1CH G3	6977770431881	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...50 W	24.2 V	0.82C...0.99	92	< 1	50k h / Tc MAX	-20...+45	70	I, II	IP20	346	32	22	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
	OTi DALI 80/220-240/24 1CH G3	6977770431867	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...80 W	24.2 V	0.89C...0.99	93	< 1	50k h / Tc MAX	-20...+45	85	I, II	IP20	346	32	22	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
	OTi DALI 160/220-240/24 1CH G3	6977770431904	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...160 W	24.2 V	0.92C...0.99	93	< 1	50k h / Tc MAX	-20...+45	90	I, II	IP20	300	50	35	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
	OTi DALI 50/220-240/24 4CH DT6/8 G3	6977770431966	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...50 W	24.2 V	0.82C...0.99	92	< 1	50k h / Tc MAX	-20...+45	70	I, II	IP20	346	32	22	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
	OTi DALI 80/220-240/24 4CH DT6/8 G3	6977770431942	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...80 W	24.2 V	0.89C...0.99	93	< 1	50k h / Tc MAX	-20...+45	85	I, II	IP20	346	32	22	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
	OTi DALI 250/220-240/24 4CH DT6/8	6937186175984	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...250 W	24.2 V	0.92C...0.99	95	< 1	50k h / Tc MAX	-20...+45	80	I, II	IP20	300	50	37	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
	OTi DALI 160/220-240/24 2CH DT6/8 G3	6977770431928	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...160 W	24.2 V	0.92C...0.99	93	< 1	50k h / Tc MAX	-20...+45	90	I, II	IP20	300	50	35	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
	OTi DALI 50/220-240/48 1CH	6977770432451	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	195...264 V	176...276 V	0...50 W	48.2 V	0.82C...0.99	92	< 1	50k h / Tc MAX	-20...+50	80	I, III	IP20	346	32	22	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
	OTi DALI 80/220-240/48 1CH	6977770432475	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...80 W	48.2 V	0.89C...0.99	93	< 1	50k h / Tc MAX	-20...+45	85	I, II	IP20	346	32	22	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
	OTi DALI 160/220-240/48 1CH	6977770432499	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...160 W	48.2 V	0.92C...0.99	95	< 1,5	50k h / Tc MAX	-20...+50	80	I, III	IP20	300	50	35	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
	OTi DALI 250/220-240/48 4CH DT6/8	6937186176004	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...250 W	48.2 V	0.92C...0.99	95	< 2	50k h / Tc MAX	-20...+45	75	I, II	IP20	300	50	37	CE, CCC, BIS, EL, ENEC 25, RCM, MM	20
IT DIM	IT D0 36/220-240/24 C	6937186142214	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	36 W	24.2 V + 1,5 V	0.93C...0.99	87	< 3	50k h / Tc MAX	-25...+50	75	II	IP20	240	60	25	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 75/220-240/24 C	6937186142238	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	75 W	24.2 V + 1,5 V	0.93C...0.99	92	< 3	50k h / Tc MAX	-25...+50	80	II	IP20	275	60	25	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 150/220-240/24 C	6937186142252	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	150 W	24.2 V + 1,5 V	0.91C...0.99	93.5	< 3	50k h / Tc MAX	-25...+50	75	II	IP20	320	60	30	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 200/220-240/24 C	6937186142276	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	200 W	24.2 V + 1,5 V	0.96...0.99	93	< 3	50k h / Tc MAX	-25...+50	85	II	IP20	320	60	30	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 36/220-240/24/2C C TW	6937186142290	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	36 W	24.2 V + 1,5 V	0.93C...0.99	87	< 3	50k h / Tc MAX	-25...+50	75	II	IP20	240	60	25	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 75/220-240/24/2C C TW	6937186142313	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	75 W	24.2 V + 1,5 V	0.93C...0.99	92	< 3	50k h / Tc MAX	-25...+50	80	II	IP20	275	60	25	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 150/220-240/24/2C C TW	6937186142351	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	150 W	24.2 V + 1,5 V	0.91C...0.99	93.5	< 3	50k h / Tc MAX	-25...+50	75	II	IP20	320	60	30	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 200/220-240/24/2C C TW	6937186142337	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	200 W	24.2 V + 1,5 V	0.96...0.99	93	< 3	50k h / Tc MAX	-25...+50	85	II	IP20	320	60	30	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
OT FIT PC	OT FIT 36/220-240/24 PC	6977770438460	SELV	Phase Cut	No	n/a	198...264 V	not relevant	2.42...36 W	24.2 V	0.45C...0.98	85	< 5	50k h / Tc MAX	-20...+50	80	I	IP20	103	67	29.5	CE, ENEC, CCC, RCM	30
	OT FIT 75/220-240/24 PC	6977770438484	SELV	Phase Cut	No	n/a	198...264 V	not relevant	24.2...75 W	24.2 V	0.95...0.98	92	< 5	50k h / Tc MAX	-20...+45	80	I	IP20	110	76	30	CE, ENEC, CCC, RCM	20
	OT FIT 150/220-240/24 PC	6977770438569	SELV	Phase Cut	No	n/a	198...264 V	not relevant	60.5...150 W	24.2 V	0.95...0.98	92	< 5	50k h / Tc MAX	-20...+45	80	I	IP20	170	76	30	CE, ENEC, CCC, RCM	10



OT SLIM



IT FIT



ELEMENT G2



ELEMENT G3



Dimmers

Product Family	Product Name	EAN10	Isolation	Dimming Interface	Touch DIM	Progra-mming Interface	Input Voltage AC	Input Voltage DC	Output Power	Output Voltage	Power Factor [λ]	Efficiency (max.) [%]	Ripple (100 Hz) [%]	Lifetime [h]	Ambient Temperature Range [°C]	Max Tc [°C]	Prote-ction Class	IP Rating	Length [mm]	Width [mm]	Height [mm]	Certificates & Approbations	Standard pack [pcs.]
OT SLIM	OT SLIM 30/220-240/24	6977770438699	SELV	not relevant	No	n/a	195.5...276 V	176...250 V	30 W	24.2 V	0.95...0.98	86	< 5	50k h / Tc MAX	-25...+45	75	I, II	IP20	270	30	17.5	CE, ENEC, CCC, RCM, BIS, TISI	50
	OT SLIM 60/220-240/24	6977770438712	SELV	not relevant	No	n/a	195.5...276 V	176...250 V	60 W	24.2 V	0.94C...0.98	88	< 5	50k h / Tc MAX	-25...+45	70	I, II	IP20	338	30	17.5	CE, ENEC, CCC, RCM, BIS, TISI	30
	OT SLIM 100/220-240/24	6977770438736	SELV	not relevant	No	n/a	195.5...276 V	176...250 V	100 W	24.2 V	0.94C...0.95	91	< 5	50k h / Tc MAX	-25...+45	80	I, II	IP20	374	30	18.5	CE, ENEC, CCC, RCM, BIS, TISI	30
	OT SLIM 160/220-240/24	6977770438750	SELV	not relevant	No	n/a	195.5...276 V	176...250 V	160 W	24.2 V	0.97...0.99	92	< 5	50k h / Tc MAX	-25...+45	75	I, II	IP20	404	30	21.5	CE, ENEC, CCC, RCM, BIS, TISI	30
	OT SLIM 250/220-240/24	6977770438774	SELV	not relevant	No	n/a	195.5...276 V	176...250 V	250 W	24.2 V	0.95...0.98	92	< 5	50k h / Tc MAX	-25...+45	80	I, II	IP20	343	60	31	CE, ENEC, CCC, RCM, BIS, TISI	10
IT FIT	IT FIT 30/220-240/24	6937186142672	SELV	not relevant	No	n/a	198...264 V	not relevant	30 W	24 V	0.90C...0.98	87	< 3	50k h / Tc MAX	-20...+50	80	I, II	IP20	170	40	30	CE, CCC, RCM, BIS, MM	50
	IT FIT 60/220-240/24	6937186142696	SELV	not relevant	No	n/a	198...264 V	not relevant	60 W	24 V	0.92C...0.98	89	< 3	50k h / Tc MAX	-20...+50	85	I, II	IP20	224	40	30	CE, CCC, RCM, BIS, MM	30
	IT FIT 120/220-240/24	6937186142610	SELV	not relevant	No	n/a	198...264 V	not relevant	120 W	24 V	0.94C...0.98	90	< 3	50k h / Tc MAX	-20...+50	90	I, II	IP20	284	40	30	CE, CCC, RCM, BIS, MM	30
	IT FIT 180/220-240/24	6937186142634	SELV	not relevant	No	n/a	198...264 V	not relevant	180 W	24 V	0.94C...0.98	92	< 3	50k h / Tc MAX	-20...+50	90	I, II	IP20	324	40	30	CE, CCC, BIS, RCM	20
	IT FIT 250/220-240/24	6937186142658	SELV	not relevant	No	n/a	198...264 V	not relevant	250 W	24 V	0.97...0.99	93	< 3	50k h / Tc MAX	-20...+50	90	I, II	IP20	375	50	35	CE, CCC, BIS, RCM	10
ELEMENT G2	ELEMENT 30/220-240/12 G2	6937186161819	SELV	not relevant	No	n/a	198...264 V	not relevant	30 W	12.5 V	> 0.95	86	< 3	30k h / Tc MAX	-20...+50	75	I, II	IP20	145	40	26.5	CE, CCC, MM, RCM, BIS	40
	ELEMENT 60/220-240/12 G2	6937186161857	SELV	not relevant	No	n/a	198...264 V	not relevant	60 W	12.5 V	> 0.95	88	< 3	30k h / Tc MAX	-20...+50	85	I, II	IP20	200	40	31	CE, CCC, MM, RCM, BIS	30
	ELEMENT 120/220-240/12 G2	6937186161895	SELV	not relevant	No	n/a	198...264 V	not relevant	120 W	12.5 V	> 0.95	89	< 3	30k h / Tc MAX	-20...+50	90	I, II	IP20	260	40	31	CE, CCC, MM, RCM, BIS	20
	ELEMENT 180/220-240/12 G2	6937186161932	SELV	not relevant	No	n/a	198...264 V	not relevant	180 W	12.5 V	> 0.95	91	< 3	30k h / Tc MAX	-20...+50	90	I, II	IP20	300	40	31	CE, CCC, MM, RCM, BIS	20
ELEMENT G3	ELEMENT 30/220-240/24 G3	6937186134226	SELV	not relevant	No	n/a	198...264 V	not relevant	30 W	24 V	> 0.95	89	< 3	30k h / Tc MAX	-20...+45	85	I, II	IP20	135	36	25	CE,RCM, CCC, BIS, MM	20
	ELEMENT 60/220-240/24 G3	6937186134240	SELV	not relevant	No	n/a	198...264 V	not relevant	60 W	24 V	> 0.95	89	< 3	30k h / Tc MAX	-20...+45	90	I, II	IP20	151.5	40.2	31	CE,RCM, CCC, BIS, MM	20
	ELEMENT 120/220-240/24 G3	6937186134264	SELV	not relevant	No	n/a	198...264 V	not relevant	120 W	24 V	> 0.95	93	< 3	30k h / Tc MAX	-20...+45	90	I, II	IP20	253	42.5	31	CE,RCM, CCC, BIS, MM	20
	ELEMENT 180/220-240/24 G3	6937186134400	SELV	not relevant	No	n/a	198...264 V	not relevant	180 W	24 V	> 0.95	93	< 3	30k h / Tc MAX	-20...+45	96	I, II	IP20	253	42.5	31	CE,RCM, CCC, BIS	20
	ELEMENT 250/220-240/24 G3	6937186134387	SELV	not relevant	No	n/a	198...264 V	not relevant	250 W	24 V	> 0.95	93	< 3	30k h / Tc MAX	-20...+45	96	I, II	IP20	400	40	22	CE,RCM, CCC, BIS	20
Dimmers	IT D0P/12-48V/4C NFC L C RGBW	6937186134127	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T + NFC	not relevant	11...54	480 W	12...48 V	n.a.	n.a.	n.a.	50k h / Tc MAX	-25...+50	65	II	IP20	195	51	20	CE, ENEC, UL, FCC, BIS, RCM, MM	20
	OT Wi DIM 12-48 5CH CA	6937186115232	SELV	Bluetooth CASAMBI	No	CASAMBI	not relevant	11...54	576 W	12...48 V	n.a.	n.a.	n.a.	50k h / Tc MAX	-10...+50	75	III	IP20	186.2	28.8	21	CE	20
	OT DMX DIM 5CH	6977078993838	SELV	DMX512	No	DMX - RDM	not relevant	11...54	576 W	12...48 V	n.a.	n.a.	n.a.	50k h / Tc MAX	-10...+50	90	III	IP20	186.2	28.8	21	CE	20



OTi DALI



IT DIM



OT FIT



OT

Product Family	Product Name	EAN10	Isolation	Dimming Method	Touch DIM	Progra-mming Interface	Input Voltage AC	Input Voltage DC	Output Power	Output Voltage	Power Factor [λ]	Efficiency (max.) [%]	Ripple (100 Hz) [%]	Lifetime [h]	Ambient Temperature Range [°C]	Max Tc [°C]	Protection Class	IP Rating	Length [mm]	Width [mm]	Height [mm]	Certificates & Approbations	Standard pack [pcs.]
OTi DALI	OTi DALI 100/220-240/244CHDT6/8 P	6937186115157	SELV	DALI-2, AstroDIM	No	T4T	198...264 V	176...276 V	0...100 W	24.7 V	0.95...0.99	93	< 1,5	50k h / Tc MAX	-30...+55	75	I	IP66/IP67	237	80	40	ENEC 10, RCM, VDE, EL, MM	6
	OTi DALI 210/220-240/244CHDT6/8 P	6937186115133	SELV	DALI-2, AstroDIM	No	T4T	198...264 V	176...276 V	0...210 W	24.7 V	0.95...0.99	93	< 1,5	50k h / Tc MAX	-30...+55	80	I	IP66/IP67	330	80	47	ENEC 10, RCM, VDE, EL, MM	6
IT DIM	IT D0P 36/100-277/24 2CH P67 G	6937186176721	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	36 W	24.2 V + 1,5 V	0.73C...0.99	86	< 3	50k h / Tc MAX - 5°C	-30...+60	85	I	IP66/IP67	211	60	35	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	15
	IT D0P 75/100-277/24 2CH P67 G	6937186176745	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	75 W	24.2 V + 1,5 V	0.70C...0.99	89	< 3	50k h / Tc MAX - 5°C	-30...+60	85	I	IP66/IP67	206	60	43	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	15
	IT D0P 100/100-277/24 2CH P67 G	6937186176769	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	100 W	24.2 V + 1,5 V	0.84C...0.99	90	< 3	50k h / Tc MAX - 5°C	-30...+60	85	I	IP66/IP67	216	60	43	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	15
	IT D0P 150/100-277/24 2CH P67 G	6937186176783	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	150 W	24.2 V + 1,5 V	0.85C...0.99	92	< 3	50k h / Tc MAX - 5°C	-30...+55	90	I	IP66/IP67	231	60	43	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	15
	IT D0P 250/100-277/24 2CH P67 G	6937186176806	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	250 W	24.2 V + 1,5 V	0.80C...0.99	92	< 3	50k h / Tc MAX - 5°C	-30...+50	90	I	IP66/IP67	263	70	47	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	9
	IT D0P 350/100-277/24 2CH P67 G	6937186176820	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	350 W	24.2 V + 1,5 V	0.73C...0.99	92	< 3	50k h / Tc MAX - 5°C	-30...+50	90	I	IP66/IP67	265	92	53	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	9
OT FIT	OT FIT 30/220-240/12 P	6977770438675	SELV	not relevant	No	n/a	198...264 V	not relevant	30 W	12 V	0.80C...0.95	84	< 5	50k h / Tc MAX	-25...+55	80	I	IP67	186	35	20.5	CE, VDE-ENEC	50
	OT FIT 60/220-240/12 P	6977770438613	SELV	not relevant	No	n/a	198...264 V	not relevant	60 W	12.5 V	0.90C...0.96	87	< 3	50k h / Tc MAX	-40...+50	80	I	IP66/IP67	157	53	31.5	CE, CCC, ENEC, TISI, RCM	15
	OT FIT 150/220-240/12 P	6977770438637	SELV	not relevant	No	n/a	198...264 V	not relevant	150 W	12.5 V	0.93C...0.98	91	< 3	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	202	53	31.5	CE, CCC, ENEC, TISI, RCM	15
	OT FIT 300/220-240/12 P	6977770438651	SELV	not relevant	No	n/a	198...264 V	not relevant	300 W	12.5 V	0.95...0.99	91	< 3	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	266	83	39.5	CE, CCC, ENEC, TISI, RCM	10
	OT FIT 80/220-240/24 P	6937186115034	SELV	not relevant	No	n/a	198...264 V	not relevant	40...80 W	24 V	0.86C...0.97	88,5	< 2	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	170	53	31.5	CE, CCC, ENEC, TISI, RCM	15
	OT FIT 150/220-240/24 P	6937186115058	SELV	not relevant	No	n/a	198...264 V	not relevant	75...150 W	24 V	0.90C...0.98	92	< 2	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	240	53	31.5	CE, CCC, ENEC, TISI, RCM	15
OT	OT FIT 200/220-240/24 P	6937186115072	SELV	not relevant	No	n/a	198...264 V	not relevant	100...200 W	24 V	0.93C...0.98	93	< 2	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	215	53	31.5	CE, CCC, ENEC, TISI, RCM	15
	OT FIT 300/220-240/24 P	6937186115096	SELV	not relevant	No	n/a	198...264 V	not relevant	150...300 W	24 V	0.95...0.99	93	< 2	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	260	68	39.6	CE, CCC, ENEC, TISI, RCM	10
	OT 20/220-240/24 P	6937186114914	SELV	not relevant	No	n/a	198...264 V	176...250 V	20 W	24.2 V	0.95	83	< 10	50k h / Tc MAX	-30...+55	85	II	IP66	178	43	25	CE, CCC, ENEC, RCM	20
	OT 40/220-240/24 P	6937186114938	SELV	not relevant	No	n/a	198...264 V	176...250 V	40 W	24.2 V	0.95	85	< 10	50k h / Tc MAX	-30...+55	90	II	IP66	208	43	26	CE, CCC, ENEC, RCM	20
	OT 60/220-240/24 P	6937186114952	SELV	not relevant	No	n/a	198...264 V	176...250 V	60 W	24.2 V	0.95	87	< 10	50k h / Tc MAX	-30...+50	90	II	IP66	208	43	26	CE, CCC, ENEC, RCM	20
	OT 100/220-240/24 P	6937186114976	SELV	not relevant	No	n/a	198...264 V	176...250 V	100 W	24.2 V	0.95	90	< 1,5	50k h / Tc MAX	-30...+55	80	I	IP66/IP67	240	50	34	CE, CCC, ENEC, RCM	10
	OT 130/220-240/24 P	6937186114990	SELV	not relevant	No	n/a	198...264 V	176...250 V	130 W	24.2 V	0.95	90,5	< 1,5	50k h / Tc MAX	-30...+55	80	I	IP66/IP67	220	63	37	CE, CCC, ENEC, RCM	10
	OT 250/220-240/24 P	6937186115010	SELV	not relevant	No	n/a	198...264 V	176...250 V	250 W	24.2 V	0.95	92	< 1,5	50k h / Tc MAX	-30...+55	85	I	IP66/IP67	265	68	40	CE, CCC, ENEC, RCM	10